




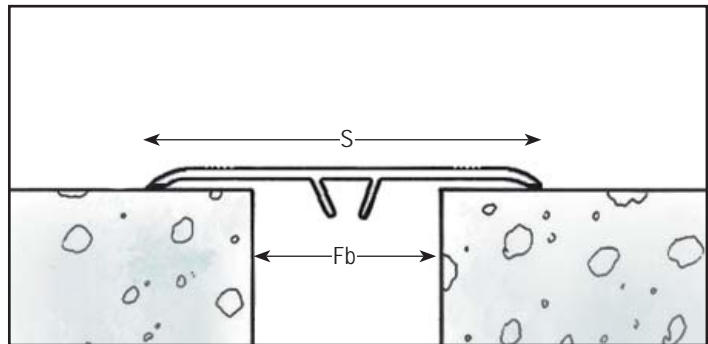

Clips affixed PVC joint covers

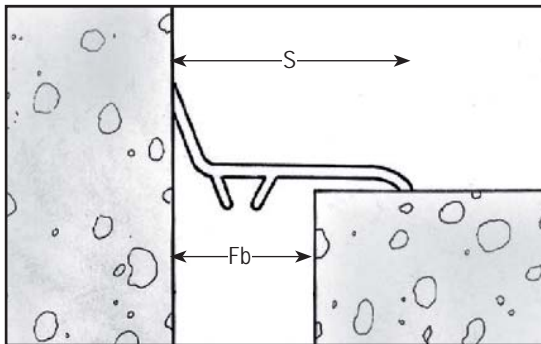


Clip S :
For structural gaps varying in width from 10 to 35 mm.



Clip SLL* :
For structural gaps varying in width from 35 to 80 mm.



Clip XL* :
For structural gaps varying in width from 60 to 110 mm.

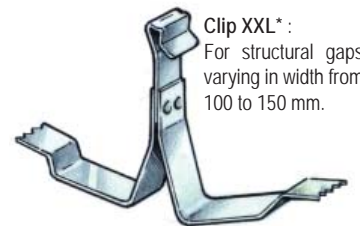

Clip XXL* :
For structural gaps varying in width from 100 to 150 mm.

* Patented models

Initial joint width Fb [mm]	Flat joint cover S [mm]	Angle joint cover S [mm]	Recommended clip	Number of clips per 3m length	
				Wall / Ceiling	Floor
10 - 35	W - LF 050	EW - ELF 050	S	5	10
35 - 50	W - LF 070	EW - ELF 070	S / SLL	5	10
40 - 70	W - LF 090	EW - ELF 90	SLL / XL	5	10
60 - 120	W - LF 150	-	SLL / XL / XXL	5	10

The colours white RAL 9016, cream RAL 1015 and grey RAL 7035 are available from stock in 3 meter lengths in 50, 70 and 90 mm wide, flat and angle models. In order to avoid possible mistakes, it is important to check that the selected models of joint covers and clips are adapted to the concerned situation on job site.

Technical characteristics		Test method
Density	1.52 g/cm ³	DIN 53479
Vicat Fusion point	80 °C	DIN 53460 / B
Modulus of elasticity	3200 N / mm ²	DIN 534457
Tensile strength	65 N / mm ²	DIN 53455
Ball hardness	120 N / mm ²	DIN 53446
Water absorption	0.04 %	DIN 53495
Bending stress	92 N / mm ²	DIN 53452
Elongation	65 %	DIN 53455
Notch impact strength at 23°C	5.5 KJ / m ²	DIN 53453
Linear tolerance	± 0.7 %	DIN 16941
Linear expansion coefficient	8 x 10 ⁻⁵ K ⁻¹	DIN 53752
Fire resistance	B2	-

The clips affixed PVC joint covers are made of non-recycled material, according to the latest available technology. They do not contain any lead, cadmium or formaldehyde and are suitable for exterior use.

CERTIFICATIONS :

PVC : manufactured in compliance with ISO 9001

Stainless steel clips : certifications ISO 14001 - ISO/TS 16949 - ISO 9001